



TRIPLE

SEVEN


Triple Seven



+386 8 200 43 52



www.777gliders.com
info@777gliders.com

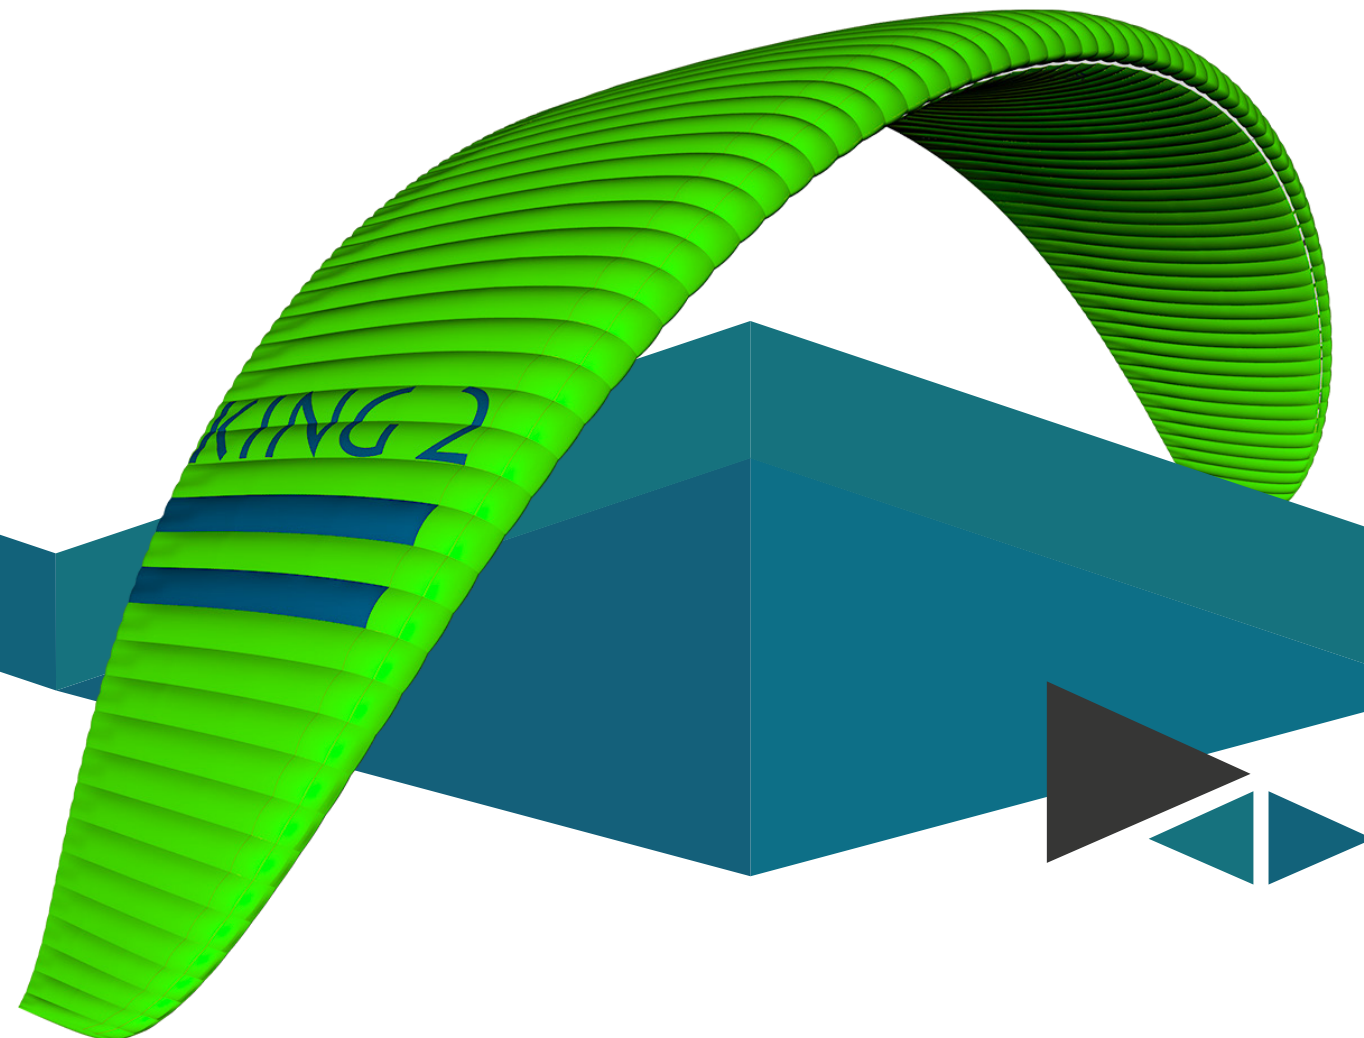

King 2 en/Itf D

10.9.2020 Ver 1.0

i n t r o d u c e d

Introduction

Welcome to the Triple Seven Team!

We are excited that you have chosen to fly the King 2, as we are confident that this glider will be the next step in your piloting career. We wish you exciting flying adventures!

Triple Seven Mission

Our company’s goal is to produce high-quality products and technologically innovative gliders of all types and classes. We are striving to develop state of the art paragliders, with the optimum compromise between safety and performance, produced in Europe.

Your success is our inspiration; our goal is your success.

Manual

This document contains complete product information and instructions to familiarize you with the main characteristics of your new glider. It includes instructions on how to use and maintain the wing. However, its purpose is not to serve as a learning material to pilot this kind of wing. As such, this is not a flying manual. Flying instructions can only be taught by flying schools and specially certified instructors.

You must take the time to read this manual carefully before the first flight, as a thorough knowledge of your equipment enables you to fly safely and to maximize your full potential. If you borrow or give your glider to another pilot, please pass this manual on with it.


If any use of Triple Seven equipment remains unclear after having read this manual, please contact your local paragliding instructor, your Triple Seven importer, or Triple Seven. This product manual is subject to changes without prior notice.

Please check www.777gliders.com for the latest information regarding our products. Welcome to the Triple Seven Team! We are excited that you

1. LTF / EN D	1
2. High performance EN/LTF-D	3
III. Introduction	4
III.i. Welcome	4
III.ii. Triple Seven Mission	4
4. King 2	7
4.1. Designer’s thoughts	8
4.2. Who is this glider for?	9
4.3. Certification	9
5. Before flight	10
5.1. Elements, components	10
5.2. Assembly	10
5.3. Harness	11
5.4. Accelerator settings	11
5.5. Brakes’ adjustments	11
5.6. Weight range	12
5.7. Wing inflation	12
5.8. Modifications on the glider	12
5.9. Preflight safety	12
6. Flying King 2	13

6.1. First Flight	13
6.2. Preflight check equipment	13
6.3. Final preflight check	14
6.4. Inflation, control, take-off	14
6.5. Line knots or tangles	14
6.6. Normal flight, best glide	15
6.7. Minimum sink	15
6.8. Accelerated flight	15
6.9. Active flying	15
6.10. Flying in turbulence	16
6.11. Fast decent techniques	17
6.12. Winch launch	19
6.13. Aerobatics	19
6.14. Primary controls failure	19
6.15. Landing	19
7. Maintenance	20
7.1. General advice	20
7.2. PacKing 2 instructions	20
7.3. Storage	21
7.4. Cleaning	21
7.5. Repair	21
7.6. Checks and control	21
VIII. PacKing 2 King 2	22
9. Technical data	24

9.1. Technical data	26
9.2. Materials description	26
9.3. King 2 risers arrangement	27
9.4. Line plan King 2	28
9.5. Line lengths King 2 M	29
X. Safety and responsibility	30
XI. Guarantee	31
XII. Registration information	32
XIII. Get involved	32
XIV. Contact	33



The King 2. Who is it for?

The King 2 is a no-nonsense EN D glider for ambitious XC pilots with a fetish for sexy, beautiful paraglider design. It sports the highest performance of any serial production 3-liner ever made while retaining the docile, forgiving character of its predecessor. This makes it the perfect wing for any pilot looking to get the edge over their contemporaries without sacrificing neither personal safety nor airborne comfort in the bargain. As such it could be seen as the ideal stepping stone towards the CCC class, but this isn't really it's greatest strength; we predict that a majority of King 2 pilots will not want to increase their workload in the air by moving to more demanding glider classes once they have seen just how well this baby goes.



Before flight

Elements, components

King 2 is delivered together with a backpack, inner bag, glider strap, Triple Seven T-shirt, and USB key with this manual.

Assembly

Before you rush to the first take-off we recommend you take your time to unpack and test your equipment on a training slope. In this way, you will have time and will not be distracted or rushed to prepare your equipment, and you will be able to do your first pre-flight check properly. The place should be flat, free of obstacles, and with light wind. This will enable you to nicely inflate the wing and also familiarize yourself with it while ground handling. Every glider has to be checked by a Triple Seven dealer, however, as a pilot, you want to do a proper pre-flight check yourself.

Firstly, prepare and spread out the glider as you would normally do. While you are spreading out and walking 2 along with the glider, observe the fabric material for any abnormalities. When you are done with the inspection of the canopy, grab the risers and spread the lines, check if the risers and maillons (carabiners) are properly closed. Identify and disentangle the A1, A2, B, C risers, and the lines including the brake lines. Connect the risers' main attachment points correctly to the harness, watch for any twists, and make sure that the main carabiners are properly closed.

Harness

King 2 has passed EN-D certification testing using a GH - ABS type harness. This certification allows the King 2 to be flown with most of the harnesses on the market, but keep in mind that the change of a harness greatly influences the feeling of the glider, depending on the effectiveness of the harness weight shift. Check with the harness manufacturer or with your instructor whether your harness is of the proper type.

The length of the harness chest strap affects the distance between the main carabiners and the wing's handling as well as your stability in the harness. Tightening the chest strap increases your stability, but greatly increases the risk of twisting after a collapse. A tight setting also increases the tendency to maintain a deep spiral. As a rule of thumb, a more open chest strap gives you more feedback from the glider, which is good for your climbing efficiency and increases safety in a flying incident. But we strongly recommend adjusting the length of the harness chest strap according to the lengths used during certification. This setting varies according to the harness size from 42cm to 50cm.

Check the settings used during testing under the certification specimen section. We recommend that your first flight with King 2 is not also with a new harness. Another rule of thumb is if you want to experience the feeling of new equipment, change only one part of the equipment at a time.

Accelerator settings

King 2 speed system increases the speed of the glider by 20km/h with the accelerator at full travel, from the trim speed at 40km/h to full speed at 60km/h.

Before attaching the accelerator system to the King 2 risers, check that the speed system inside your harness is correctly routed and that all pulleys are set correctly. Make sure there are no knots or other obstacles that might make the accelerator get stuck during usage.

The length of the speed bar lines should be adjusted on the ground so that your legs are fully extended at the point of full accelerator travel. While setting the speed line lengths make sure they are long enough, so that the speed system does not accelerate the glider by itself. If in doubt how to properly set the accelerator system, please consult your instructor or Triple Seven dealer.

Brakes adjustments

The length of the brake lines has already been adjusted by the manufacturer and is the same as used during the certification test flights. The length is set and fine-tuned during the development of the glider, therefore generally there should be no need to adjust them. We recommend flying this setting for a while, and you can still change it afterward if you wish to do so. If you change the length of the brakes, do it in a step by step process of 2 cm at a time. Bear in mind that if you make the brake lines too short, they might be applied unintentionally while the speed system is being used. The extra remaining of the brake line is there with the purpose of lengthening it when needed so don't cut it away.

Weight range

Each size of the King 2 is certified for its weight range. The above-mentioned weight includes the weight of the pilot and complete paragliding equipment, together with the glider, harness, all accessories, and optional ballast. Every glider changes its characteristics by changing the take-off weight. We recommend that you always fly your glider in the specified weight range. To measure your take-off weight, step on a scale with all your equipment packed in the rucksack.

Lower half of the weight range

Flying King 2, like any other glider, in the lower part of the weight range, causes the agility of the glider to decrease, and when flying through turbulence its tendency for collapses relatively increases as compared to flying it in the upper wing loading range. However, reactions after a collapse are less dynamic and the sink rate improves. Therefore, if you mainly fly in weak conditions, you might prefer this weight range.

Upper half of the weight range

Again, as with any other glider, flying the King 2 in the upper part of the weight range increases the stability and agility of the glider. Consequently, there is a slight increase in the glider's speed and also gliding performance, especially when flying against the wind. If you normally fly in stronger conditions and you prefer relatively more dynamic flying characteristics, you should set the take-off weight in the higher weight range. Reactions after a collapse may be more dynamic in the upper half of the weight range.

Wing inflation

Still being on the training slope and having prepared and checked everything, inflate your wing and play with it to get a feel of your new glider while ground handling. By doing this you are making a final check of the canopy and lines, and that everything is in order. You will find that the King 2 inflates very easily and smoothly without excessive energy and with minimum pressure while moving forwards. For inflation and lifting the glider you may use only the A1 riser tab. Do not pull on the risers just with your hands, instead use your whole harness. Your hands should only accompany the rising movement of the wing. When the wing is above you, apply correct pressure on the brake lines and the glider will stay above you.

Modifications on the glider

Any modifications of the lines or risers' speed system cause the loss of the certification, similarly to flying the wing outside the weight range.

Pre-flight safety

Before flying King 2, you should obtain all practical and theoretical training and the certification for flying this kind of wing. Pilots should be physically and mentally fit, using complete paragliding equipment and flying only in conditions suitable for their level of flying expertise.



Flying King 2

First Flight

Now that you have already familiarized yourself with your new glider while ground handling on a training slope, you are ready for your first flight. For the first flight, it is recommended that you choose a familiar flying area and to fly your new glider in calm conditions.

Pre-flight check equipment

Before every flight, you need to do a pre-flight check and the inspection of other equipment. Learn to do this, as it takes no extra time. This procedure may vary, depending on the instructor, pilot, or equipment settings. Some pilots have their wings always connected to the harness. However, you should have a consistent method of checkKing 2 and preparing your equipment and doing the final pre-flight check.

After the arrival on take-off, assess the suitability of flying conditions.

While walking around the canopy preparing and spreading out the wing, you should at the same time inspect the canopy. After you check the lines and connect the risers to the harness, grab the lines and slide them through your fingers as you walk towards the canopy. In this way you double-check that the lines are not tangled, stuck or damaged. If meanwhile the canopy moves, walk around and correct it again.

Final preflight check

1. Strap into the harness. The leg straps should be the first to be connected on the take-off and the last ones to be released after the flight. Make sure you are strapped in correctly and wearing a helmet.
2. Check the risers for a twist and that the carabiners are properly closed. Check if the speed system is not affecting your risers – accelerating unintentionally.
3. Check the lines. The A riser lines should be on top, and all lines untangled. Check if none of the lines are lying over or below the canopy.
4. Check the canopy. The glider should be spread out in the shape of an arch and all cells open.
5. Check the wind, take-off, and airspace. The wind should be favorable for take-off and the pilot's level of expertise. Airspace should be cleared, together with the take-off area.

Inflation, control, take-off

King 2 has easy take-off behavior while few things need to be taken into consideration. The A riser is shorter than the B and C. This means that when we hold the A risers for the take-off, we need to hold them on the mallions or higher to have the right pull geometry. The first pull needs to be strong to lift the leading edge from the ground; after that, the wing has a normal behaviour as any other D-class wing. It is always advisable to practice and improve proper launching techniques as this reduces unnecessary additional stress before the take-off.

Line knots or tangles

If you fail to observe a line knot or you find yourself flying with a knot before being able to prevent the unintentional, uncontrolled take-off, try to stay away from the ground or other pilots by flying away from the mountain, before taking any corrective action on the wing. This means that you weight shift and/or counter brake the opposite side of the wing and control the flying direction with the least amount of force needed for the wing to fly straight away from the mountain. Be careful not to apply too much brake or to fly too slowly to avoid a stall or spin. When you are at a safe distance away from the mountain and you have gained relative height by flying away, you may want to gently and briefly pull the lines that are tangled with the knot. If the knot is on the brake lines you might want to gently and briefly “pump” the appropriate brake line. Please note that by pulling the lines, the knot may get stuck in a worse position and the situation may escalate also to a stall or spin. Therefore, if you estimate that you can control the wing relatively safely and that the knot is not released by gently and briefly pulling the tangled lines, immediately fly to the landing zone and land safely.

Normal flight, best glide

Without any brakes applied and without using the accelerator, the wing flies at the so-called “trim speed”. In calm air, this is theoretically the best glide speed. The best speed glide depends on the glider's polar and air mass, vertical and horizontal speed. We recommend reading more about the theory of the best glide and McCready theory.

Minimum sink

If you apply brakes on both sides for about 10 -15 cm you will slow the glider to the theoretical minimum sink speed. But we do not recommend using this speed even for thermalling, as you achieve much better climbing and control by letting the glider fly with its “trim speed” and natural energy. With a proper take-off weight, you will find that the glider has a great climb, reactions, and agility.

Accelerated flight

After you get comfortable flying the King 2, you can start practicing using the speed system, which will provide better performance while gliding against the wind and through a sinking air mass. The King 2 was designed to be stable through its entire speed range, but this requires the use of active flying techniques. Note that any glider becomes less stable while flying accelerated and that the risk of a collapse is higher in accelerated flight. Additionally, the reaction of the glider to a collapse in accelerated flight is more radical in comparison to the one which occurs at trim speed. We recommend that you avoid accelerated flight near the ground and to be very careful using the accelerator in turbulent conditions. Use a soft speed bar, which enables you to accelerate the glider by using only one leg. To control the direction use weight shift. To control the pitch change the amount of the speed bar. Do not use or pull the brakes while using the speed bar. Use the speed bar progressively when accelerating and instantly release when you feel a slight loss of tension, pressure, or even collapse. If you encounter a collapse while using the accelerator, release the speed bar immediately before taking any other corrective action. Always keep more distance from the ground when using the speed bar.

Active flying

This is a basic flying technique for any pilot. It implies permanent control and the correction of pitch and roll movements together with the prevention of any deflations or collapses. In a nutshell, this means flying straight through active or turbulent air, so that the pilot keeps the glider above his or her head at all times, compensating and correcting any unwanted movements of the wing.

Few examples:

- While entering a strong thermal, the wing will stay a little bit behind relative to the pilot. The pilot should let the brake up allowing the wing to fly faster and to catch up.
- If the wing surges in front of the pilot, the pilot should counter brake until the surge is controlled and then release the glider to let it fly normally.
- If the pilot feels a loss of tension on the wing or a loss of pressure on the brakes on one side of the wing, he should smoothly apply the brake on the side with loss of pressure and/

- or weight shift to the opposite side until the pressure returns. After that, again release the brake and/or weight shift to the neutral position and let the glider fly normally.

The key in all cases is to avoid an over-correction and not to maintain any correction longer than necessary. After each action let the glider fly normally again. To re-establish its required flying speed. You can train or get a feeling for most of these movements safely on the ground while ground handling your glider. Good coordination of your movements and coordination with the wing on the ground will enable you a quick progression when actively flying in the air. The next step is to attend SIV courses where you should also get a better understanding of the full brake range and the glider’s speeds.

Flying in turbulence

Wing deflations can occur in strong turbulence. King 2 is designed and tested within EN-D certification rules it means it needs a pilot’s input for faster to recover from deflations. King 2 is designed and tested to recover without the pilot’s input in almost all situations by simply releasing the brakes and letting the glider fly. To train and understand all the maneuvers described, attend SIV courses.

Cascade of events

Many reserve deployments are the result of a cascade of over-correction by the pilot. Over-corrections are usually not problematic because of the input itself or its intensity, but due to the length of time, the pilot continues to over-handle. After every input, you

have to allow the wing to re-establish its normal flying speed. Note that over-corrections are often worse than no input at all.

Asymmetric deflations

Strong turbulence may cause the wing to collapse asymmetrically. Before this occurs the brake lines and the feeling of the harness will transmit a loss of pressure to the pilot. This feedback is used in active piloting to prevent a collapse. If the collapse does occur, King 2 will easily re-inflate without the pilot’s reaction, but the wing will turn towards the collapsed side. To prevent this from happening turn and actively recover the asymmetric collapse by weight shifting and applying appropriate brake input on the side that is still flying. Be careful not to over-brake your wing’s flying side. This is enough to maintain your course and give the glider enough time to recover the collapsed side by itself. To actively reopen the collapsed side after course stabilization, pull the brake line on the collapsed side firmly and release it. You can do this several times with a smooth pumping motion. After the recovery, release the brake lines for your glider to regain its trim speed. You must be aware of the fact that asymmetric collapses are much more radical when flying accelerated. This is due to the difference in weight and the inertia of the canopy and the pilot hanging below.

Symmetric deflations

Symmetric or frontal deflations will normally reopen immediately by themselves without the pilot’s input. The glider will then regain its airspeed accompanied by a small surge forwards. To actively control this event, apply both brakes slightly when the collapse occurs and then instantly release the brakes to let the glider fly. Be prepared to compensate for the glider’s slight surge forward while returning to normal flying.

Wing tangle, cravat

A cravat is very unlikely to happen with the King 2, but it may occur after a severe deflation or in a cascading situation when the wing tip gets caught in the glider’s lines. A pilot should be familiar with the procedure of handling this situation with any glider. As King 2 glider is a glider without main stabilo line. Outer B3 line has to be pulled down- Familiarize yourself with the stabilizer’s main line (“Stabilo” line (outside line on B riser) already on the ground. If a cravat occurs, the first thing to do is to try to keep the glider flying on a straight course. Do this by weight shifting and counter braKing 2 the untangled side. After that, grab the stabilizer’s main line on the tangled side and pull it down until it becomes tight again. At this point the cravat normally releases itself.

Possible solutions of the cravat situations (consult your SIV instructor):

- Pulling the wing tip B3 “stabilo” line
- Using a full stall, but it is essential to be very familiar with this manoeuvre. You also want to have a lot of relative height.
- If you are in a situation where you have a cravat and you are low in rotation or even with twisted risers, then the only solution is the reserve parachute.

Negative spin

In normal flight, you are far from a negative spin. But, certain circumstances may lead to it. Should this occur, just release the brake lines progressively and let the wing regain its flying speed. Be prepared for the glider to surge forward, compensating the surge with brake input if necessary.

Full stall

A full stall does not occur unintentionally on its own – it happens if you pull both brakes for 100% and hold them. The wing then performs a so-called full stall. Releasing the brakes improperly may lead to a massive surge of the glider with the danger of falling into the canopy. This is a complex maneuver and as such outside the scope of this manual. You should practice and learn this maneuver only on a SIV course under professional supervision.

Measurement and ranges (according to Table 8)				Classification
Symmetric control pressure	Symmetric control travel (cm)			—
	max. weight in flight up to 80 kg	max. weight in flight 80 kg to 100 kg	max. weight in flight greater than 100 kg	—
Increasing	Greater than 55	Greater than 60	Greater than 65	A
Increasing	40 to 55	45 to 60	50 to 65	C
Increasing	35 to 40	35 to 45	35 cm to 50	D
Increasing	Less than 35	Less than 35	Less than 35	F
Approximately constant	Greater than 55	Greater than 60	Greater than 65	B

Deep stall

Generally when in a deep stall, the wing has no forward motion and at the same time high sink speed. When in deep stall the wing is almost fully inflated. With King 2 it is very unlikely to get into this situation unintentionally. This could possibly happen if you are flying at a very low speed in turbulent conditions. Also, the porosity of the material and line stretch on a very old glider can increase the possibility of the deep stall tendency. If you trained this maneuver on a SIV course you would realize that it is very hard to keep the King 2 in a deep stall. If you apply the brakes a little bit too much you enter the full stall. If you release the brakes just a little bit too much the wing returns to normal flight. If you want to practice the deep stall on SIV courses, you need to master the full stall first.

Fast decent techniques

Fast descent techniques should be well familiar to any pilot as they are important resources to be used in certain situations. These maneuvers should be learned at your flying school as a part of paragliding pilot training. Nevertheless, we recommend practicing these maneuvers on SIV courses under professional supervision.

Big ears

This is a safe method to moderately loose altitude while still maintaining forward speed. We recommend the use of 2c5 line for the descent technique. This way, the pilot will have a more stable descent without flapping that can occur with normal ears. The pilot pulls the 2c5 line while using a small amount of speed system. The wing will curve back, and the glider will start the descent. The glider will reopen by itself. If you use the normal ears, to reopen them, one needs to use a longer pull instead of pumping the brake lines. Release big ears at least 100 meters above the ground. While using big ears, the wing speed decreases, which is why we recommend using the accelerator halfway in combination with big ears to maintain enough horizontal speed and to also additionally increase vertical speed.

B line stall

While in the B-stall the glider has no horizontal speed and the sink rate increases to about -10m/s. To enter the B-stall reach for the B risers just above the maillons and pull both B line risers symmetrically for about 20 cm. To exit the maneuver, simultaneously release both risers quickly. On exit, the King 2 gently dives without deep stall tendencies.

Spiral dive

The spiral dive is the most demanding of all three maneuvers (Big ears, B-stall, Spiral) and should only be trained gradually and always at high altitude. The spiral dive should be practiced and learned on an SIV course under professional supervision. To enter the spiral, weight shift to the desired side and gradually apply the brake on the same side. Then let the wing accelerate for two turns and you will enter the spiral dive.

While in the spiral, you can control your descent rate and bank angle by applying more or less inner brake. Depending on how steep the spiral is you may need to use also outer brake. To exit the spiral dive we recommend that the pilot is in the neutral weight shift position. If you release the inner brake, the wing exits the spiral dive by itself.

King 2 does not tend a stable spiral until -14m/s descent, but you should be aware of the procedure for exiting a stable spiral. King 2 can tend a stable spiral until -14m/s descent, so you should be aware of the procedure for exiting a stable spiral.

To exit a stable spiral dive, weight shift to the opposite side of the turn and apply the outer brake until feeling the deceleration of the wing rotation. Then release the outer brake and let the glider decelerate for the next couple of turns. To avoid a big pendulum movement after exiting the spiral, apply a short brake input on the inner side before the glider exits the spiral.

Warnings (Spiral dive):

- There is a possibility of losing consciousness while in the spiral dive. Never make a spiral with more than 16-18m/s sink King 2 speed.
- In fast spirals it may be necessary to apply the outer brake to begin exiting the spiral dive.
- If practicing the spiral dive low, a pilot may not have enough altitude or time to safely exit this manoeuvre.

Winch launch

King 2 is easy to launch using a winch and has no special characteristics considering this kind of launch. To practice this launching technique special training is needed and you have to be aware of the procedures and dangers, which are specific for winching. We do not recommend using any special towing device which accelerates the glider during the winch launch.

Aerobatics

King 2 was not designed for aerobatics, therefore, these may not be performed and should be extremely avoided, also increased stress will influence long term glider performance on this glider. In addition to this, any extreme maneuvers place unnecessary stress on the glider and shorten its lifespan.

Primary controls failure

If for any reason you cannot use the brake lines, you have to pilot the wing to the landing-place by using weight shift. Weight shift should be enough to safely land the glider. You can also use the C risers to control and steer the wing. Be careful not to over-handle the glider by using the C riser technique when

steering. By pulling the C risers too strong you can cause a stall or a negative spin.

Land your glider at trim speed without using the C risers, to avoid over-handling the glider low above the ground. We recommend using a weight shift.

SIV training

We don't recommend the SIV training with the King 2, however if done, the asymmetric and symmetric collapse need folding

lines in order to execute the manoeuvres properly and safely.

Landing

Similarly to the take-off, the King 2 landing characteristics are easy. In turbulent conditions it is advisable to apply about 15% of the brakes, to increase stability and the feeling of the glider. Before landing, adopt the standing position as this is the most effective and the safest way to compensate the touch down with your legs. Again we recommend training the landing maneuver, as it might be useful to be able to land in small places, especially in an unknown cross country terrain. Learn to evaluate the wind direction by observing the signs on the ground and also your drift while making turns. This proves to be useful for cross country when landing outside of your usual landing field. Another advice we suggest taking 2 into account in stronger winds is to go higher for the landing fields and thus assuring you reach them. Likewise, always look for possible alternatives downwind.

Maintenance

General advice

Careful maintenance of your glider and the following simple guidelines will ensure a much longer airworthiness and performance of your wing:

- Pack your glider after you land and do not unnecessarily expose it to UV radiation by leaving it on the landing site unpacked. The sun UV radiation degrades the cloth and lines material.
- Fold your glider like recommended under the section of packing instructions.
- If the glider is damp or wet when you pack it, partially unfold it at home to allow it to dry. Do not dry it in direct sunlight.
- Avoid exposing the glider to violent shocks, such as the leading edge hitting the ground.
- Avoid dragging the glider on the ground or through rocky terrain as you might damage the lines or canopy.
- Avoid stepping on the lines or canopy, especially when they are lying on a hard surface.
- Avoid exposing the glider to salt water, as it damages the lines and the canopy material (wash with fresh water).
- Avoid bending your lines, especially in a small radius.
- Avoid opening your glider in strong winds without first untangling the lines.
- In general, avoid exposing your glider to very hot or humid environments, UV radiation or chemicals.

Packing instructions

It is important to correctly pack your glider as this prolongs its lifespan. We recommend that you fold the glider like a harmonica, neatly aligning the profiles with the leading edge reinforcements side by side. The wing should then be folded in two parts or one folds only for the time of moving it for flying. The wing should be packed as loosely as possible. While packing be careful not to trap any grasshoppers inside your canopy as they will tear the canopy cloth. This technique will make your glider last longer and ensure its best performance.

Storage

“Packed flat out and straight”, store your glider in a dry place at room temperature. Do take care, you don’t bend the lines at too big angles as this may shorten their lifespan. Pack them in nice big circles and store in the canopy. The glider should not be stored damp, wet, sandy, salty or with objects inside the cells of the glider. Keep your equipment away from any chemicals.

Cleaning

If necessary always clean your glider with fresh water and a cloth only, without using any cleaning chemicals. This includes also the lines and canopy. More importantly, always remove any stones or sand from the canopy as they will gradually damage the material and reduce the glider’s lifespan.

Repair

To repair small damages (less than 5cm) on the canopy cloth, you can use the rip stop tape. Greater damages, including stitches and lines must be repaired by a specialized repair shop. Damaged lines should be replaced by a Triple Seven dealer. When replacing a line it should always be compared with the counterpart for adjusting the appropriate length. After the line was repaired, the wing should be inflated before flying, to ensure that everything was done correctly. Major repairs, such as replacing panels, should only be carried out by a Triple Seven distributor or Triple Seven. If you are unsure about the damage or in any doubt please contact Triple Seven.

Checks and control

To ensure the wing’s airworthiness the King 2 has to be periodically serviced and checked to guarantee that the glider continues to fulfil the EN certification results and to extend your glider’s lifespan. We recommend the first line check with 30 flying hours. This is when the lines settle to their position. The glider needs to be fully checked after 100 hours or 24 months of usage, whichever comes earlier. Please note that the condition of the glider can vary considerably depending on the type of usage and environment. Salty coastal air or dunes will considerably affect your wing’s material. For more information please visit our website.

Retrim of the glider

We recommend the first line check with 30 flying hours.

Packing King 2

1. FOLD THE GLIDER LIKE HARMONICA AND ALIGN THE CELLS



2. FOLD THE GLIDER WITH THE HELP OF PACKING 2 BLADDER





3. SLIDE THE GLIDER INTO THE BAG AND FOLD THE TRAILING EDGE. USE SPECIAL POCKET FOR THE RISERS



5. FINISHED



Technical data

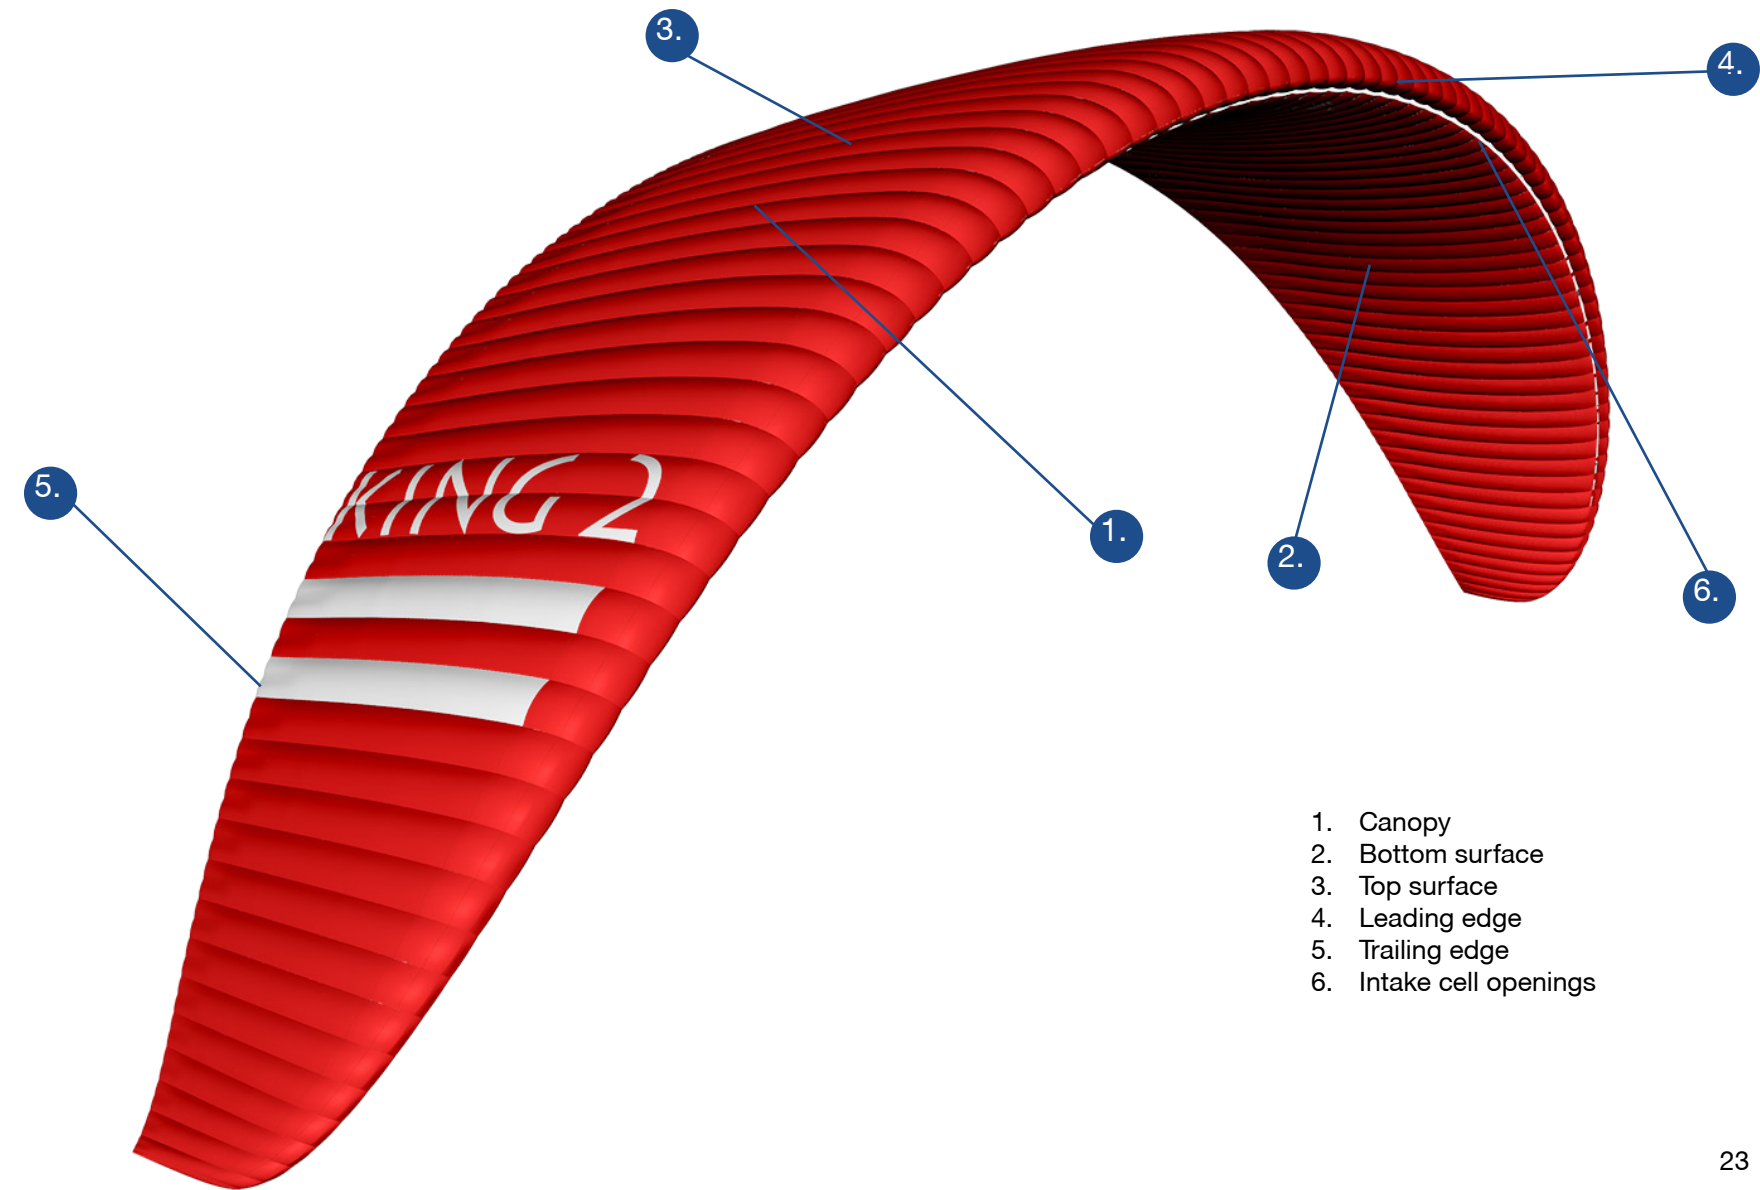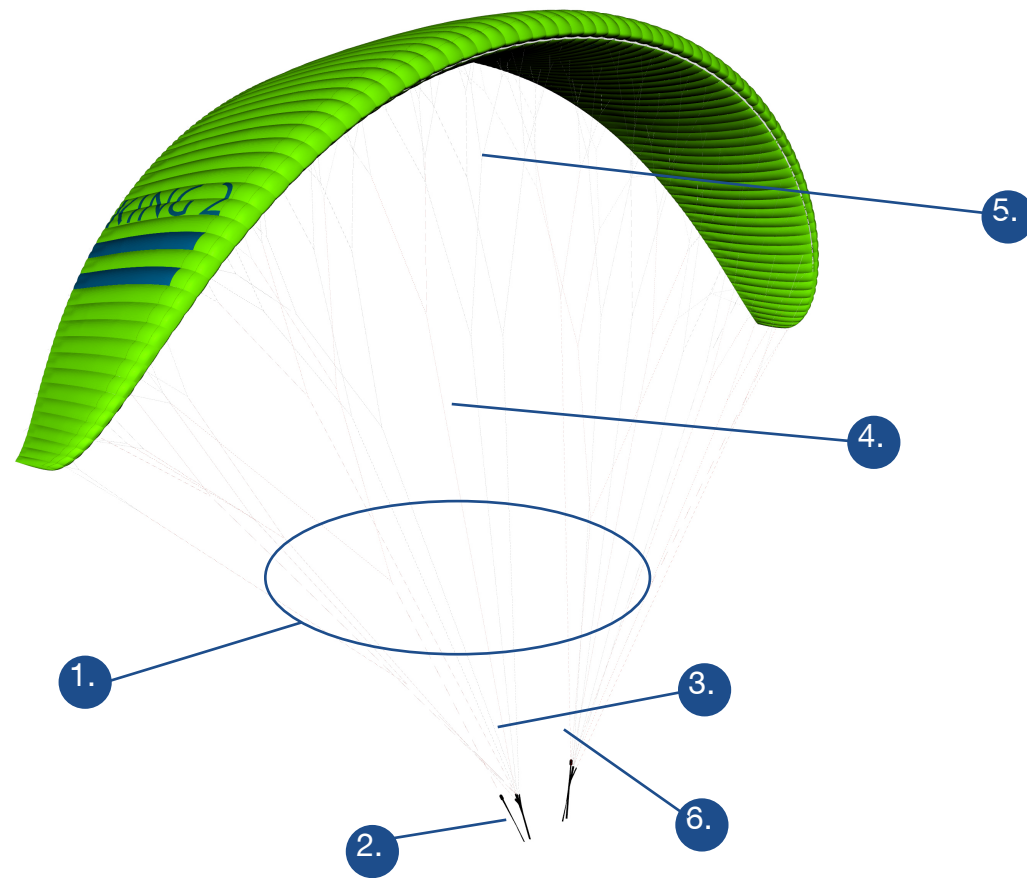

Technical data

		King 2 S	King 2 MS	King 2 ML	King 2 L
	Cell number	88	88	88	88
Flat	Area (m2)	20.1	21.7	23.5	
	Span (m)	11.8	12.3	12.8	
	Aspect ratio	6.9	6.9	6.9	6.9
Projected	Area (m2)	17	18.4	19.9	
	Span (m)	9.6	10.0	10.4	
	Aspect ratio	5.4	5.4	5.4	5.4

Risers		A	A'	B	C	
King 2 S	Lenght mm	455	455	510	510	Standard
	Lenght mm	298	316	410	510	Accelerated
						Distance between pulleys 157 mm
King 2 MS	Lenght mm	475	475	530	530	Standard
	Lenght mm	313	330	430	530	Accelerated
						Distance between pulleys 162 mm
King 2 ML	Lenght mm	495	495	555	555	Standard
	Lenght mm	318	335	437	555	Accelerated
						Distance between pulleys 177 mm
King 2 L	Lenght mm					Standard
	Lenght mm					Accelerated
						Distance between pulleys 00 mm

Trimmers	NO	Riser lengths (difference not more than ±5 mm from the lengths laid down in the manual.			
----------	----	---	--	--	--

In flight Weight	S	MS	ML	L
Minimum kg	70	80	90	100
Maximum kg	85	97	108	119
Wing weight	5.38	5.6	5.96	
Certification	D	D	D	

Materials description

Rook 3	All sizes
CANOPY	FABRIC CODE
Leading edge	Dominico 30
Upper surface	Dominico 30
Bottom surface	Skytex 27
Profiles	Skytex Porcher 40 hard

SUSPENSION LINES	FABRIC CODE
Upper cascades	Liros DC (35, 40, 60)
Upper cascades	A-8000-U-030-000

Middle1 cascades	Liros DC (40,60)
	A-8000-U-30-000


Middle 2 cascades	Liros DC 161, DC 100
	A-8000-U-030-000 (50, 70)

Main	Liros DC 161, DC 161
Main	A-8000-U-120-000
Main stabilo	A-8000-U-070-000



Brake upper	Liros DC 30
Brake middle 1	A-8000-U-030-000
Brake middle 2	A-8000-U-050-000 (70, 90)
Brake main	TSL 220

RISERS	FABRIC CODE
Material	Liros 13 mm black nylon webbing
Pulleys	4x Harken PA18

King 2 risers arrangement

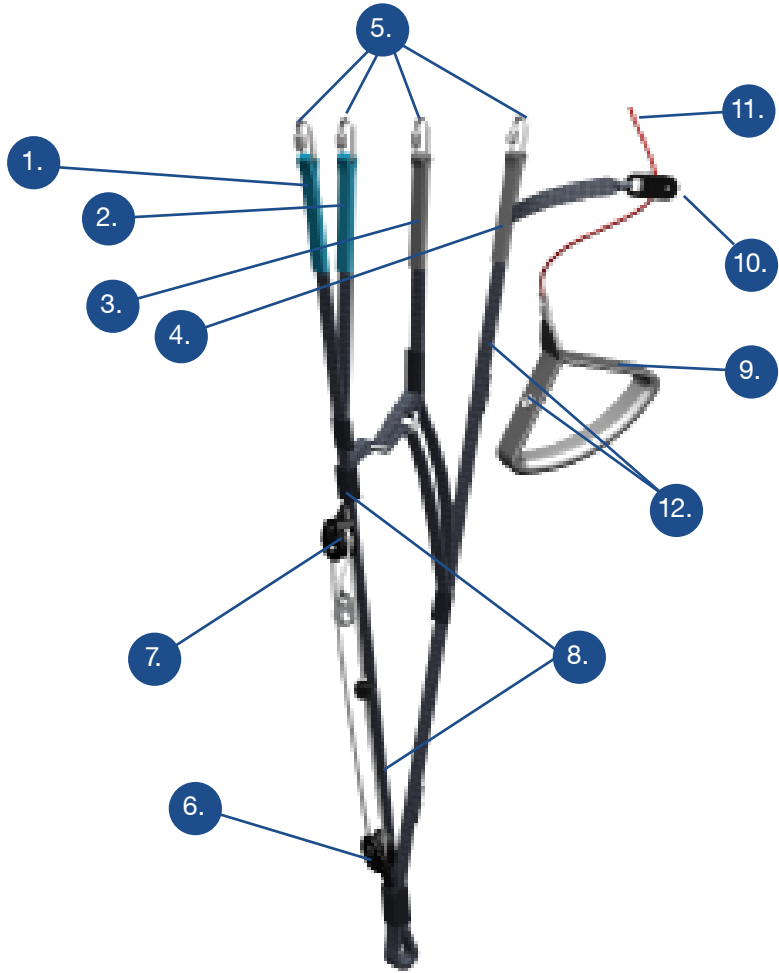

1. A1 riser
2. A2 riser, (Ears)
3. B riser, (B-Stall)
4. C riser
5. Maillons
6. Main attachment point
7. Speed bar attachment point
8. Speed bar pulleys
9. Brake handle
10. Brake line pulley
11. Main brake line
12. Clip for brake handle
13. King 2 has no trimmers or any other adjustable or removable device

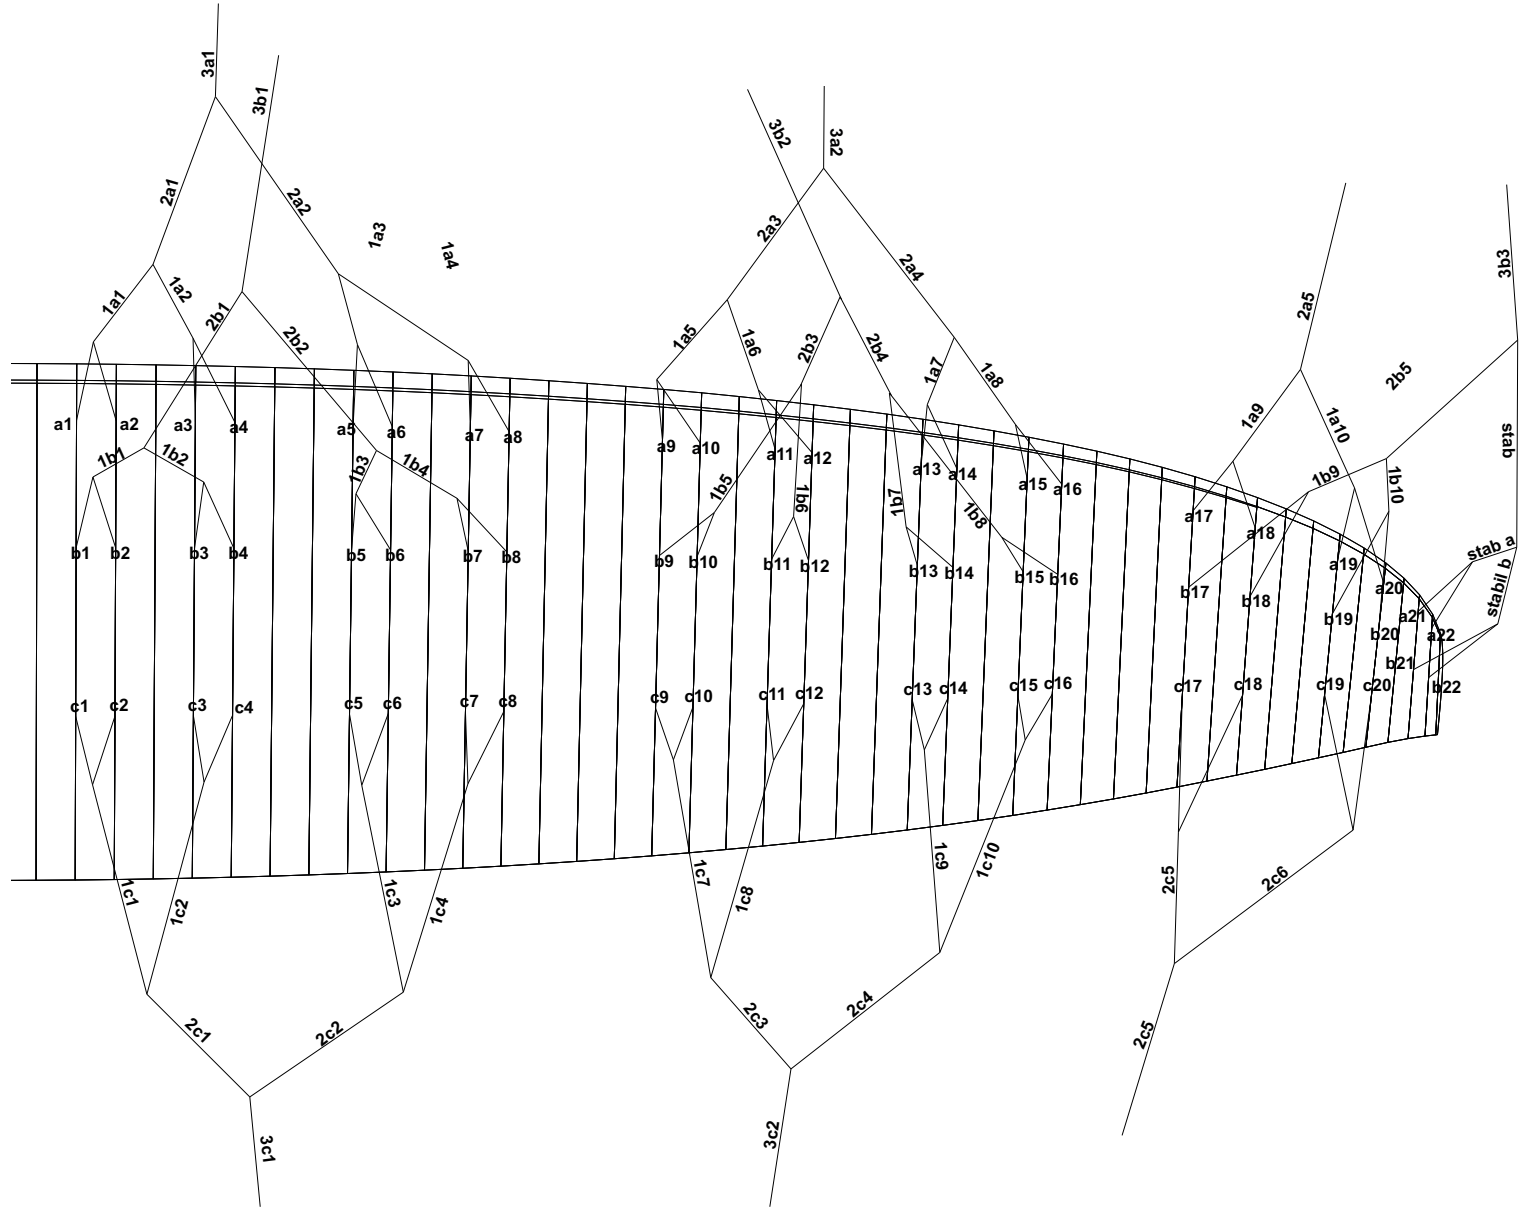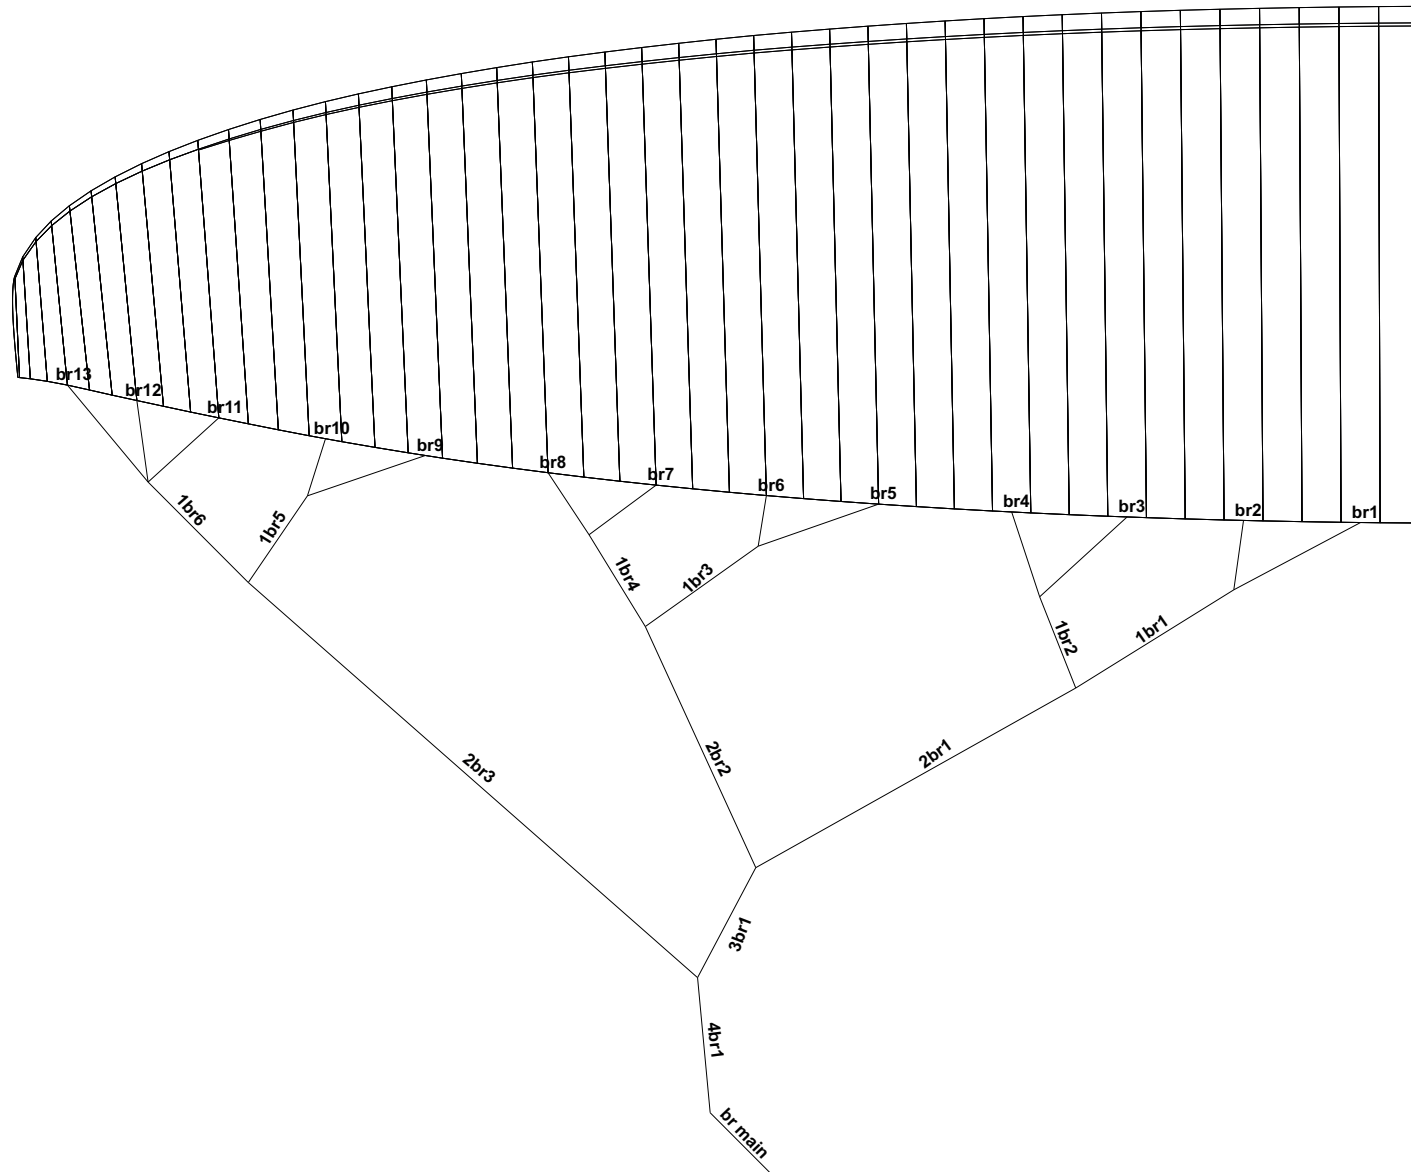

New BC system

is designed for easier and efficient use:

- Double gearing system deducts the pulling force needed to engage the system.
- While flying on bar it is important, that your hand slides down the riser and follows the BC system handle in a way, that when you engage the system, it starts pulling the B row with first mm of the pull.
- In the repair kit, you will find also a spare line if one is needed in the future.
- The system is to be considered as an added feature to a normal active flying with the brake input.



Safety and responsibility

Paragliding is a dangerous and high risk activity, where safety depends on the person practicing it. By purchasing and using this equipment you declare that you are a certified paragliding pilot, and you accept all risks involved in paragliding activities, including serious injury and death. Improper use or misuse of paragliding equipment considerably increases the risks.

The designer, manufacturer, distributor, wholesaler and retailer cannot and will not guarantee your safety when using this equipment, nor accept responsibility for any damage, injury or death as a result of the use of this equipment. This equipment should only be used by qualified and competent pilots. You must not use this equipment if you are not trained.

You alone as a qualified and competent pilot must take full responsibility to ensure that you understand the correct and safe use and maintenance of this paragliding equipment, to use it only for the purpose that it was designed for, and to practice all proper safety procedures before and during its use.

Guarantee

Triple Seven WARRANTY:

All Triple Seven products are fully warranted for 24 months, against material defects that are not the result of normal wear or accidental damage.

Spare parts

To obtain the spare parts, you can use info@777gliders.com

To obtain the spare lines you can do so via web page at

<https://777gliders.com/ordering-spare-lines/>

Registration information

To fully use all Triple Seven maintenance and warranty services you need to register your glider on our website. Wanting to provide good product support, we invite you to do so, even if you bought your glider second-hand.

Triple Seven Warranty & Product registration:

<http://www.777gliders.com/tripleseven/support>

Get involved

As a new Triple Seven pilot we invite you to contact us in case of any technical or practical issues regarding equipment or techniques. We also invite you to send us your flying photos, videos or even postcards. We would like to hear from you and your exciting adventures with your new glider! Finally, join our Facebook community and share the passion. Have fun!

Contact

Triple Seven Gliders

Company: 777 jadralna padala d.o.o.

Address: Ulica Ane Zihlove 10

Postal Code / City: 1000 Ljubljana

Country: Slovenia

Tel.: +386 40 777 313

Email: info@777gliders.com

Online resources

For complete help, the latest news, product information and support go to:

Official website:

www.777gliders.com

Facebook:

www.facebook.com/TripleSevenParagliders

Instagram

www.instagram.com/triplesevengliders

Newsletter register:

www.777gliders.com/newsletter/subscriptions

Ask questions, make suggestions

General questions:

info@777gliders.com

